


YF-1 Cast Stainless Steel Y-strainer Flanged 10K/ 150LB

Feature

- Shell Wall Thickness: ANSI B16.34
- Face to Face ANSI B16.10 / JISB2002
- End Flanges ANSI B16.5 / JISB2210

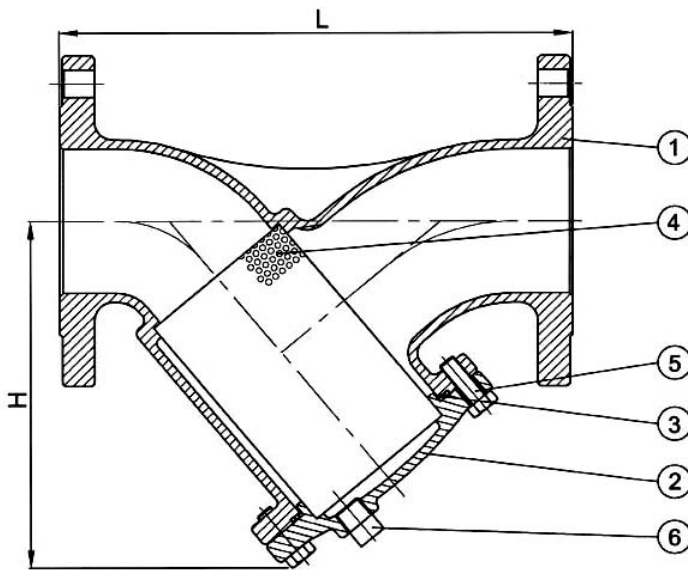

Screen Specification

SIZE	PERFORATION
1/2" ~ 1 1/2"	1mm
2" ~ 12"	2mm
14" ~ 24"	4mm

Material List

NO.	PART NAME	MATERIAL		
		304SS	316SS	316L
1	BODY	SCS13	SCS14	SCS16
		CF8	CF8M	CF3M
2	CAP	SCS13	SCS14	SCS16
		CF8	CF8M	CF3M
3	GASKET	PTFE		
4	SCREEN	SS304	316	SS316L
5	BOLT NUT	A193-B7 ASTMA 194-B8		
6	PLUG	SS304	SS316	SS316L

Test Pressure To API 598

		ANSI 150LB	JIS 10K
Shell	By water	450 PSI (32 kg/cm ²)	20 kg/cm ²
	By air	80PSI (6 kg/cm ²)	6 kg/cm ²

Dimension

SIZE	IN	1/2"	3/4"	1"	1-1/2"	2"	2-1/2"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"
	MM	15	20	25	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
L		120	140	150	190	210	250	280	340	380	420	500	730	810	960	1040	1120	1200	1400
H		75	75	100	120	140	175	196	244	277	320	390	430	580	630	720	880	980	1170